

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/051363 A2

(51) International Patent Classification⁷: **G03B 21/00**

(21) International Application Number:
PCT/US2003/037978

(22) International Filing Date:
26 November 2003 (26.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/430,997 4 December 2002 (04.12.2002) US
60/430,819 4 December 2002 (04.12.2002) US

(71) Applicant (for all designated States except US): **THOMSON LICENSING S.A.** [FR/FR]; 46 Quai A. Le Gallo, F-92648 Boulogne Cedex (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HALL, Estill, Thone, Jr.** [US/US]; 9978 Niagara Drive, Fishers, IN 46038 (US). **O'DONNELL, Eugene, Murphy** [US/US]; 7594 Timber Springs Drive, Fishers, IN 46038 (US). **DRAZIC, Valter** [FR/FR]; 7 Allée du Pigeon Blanc, F-35830 Betton (FR).

(74) Agents: **TRIPOLI, Joseph, S. et al.**; THOMSON Licensing Inc., 2 Independence Way, Suite #2, Princeton, NJ 08540 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: TWO-STAGE PROJECTOR ARCHITECTURE

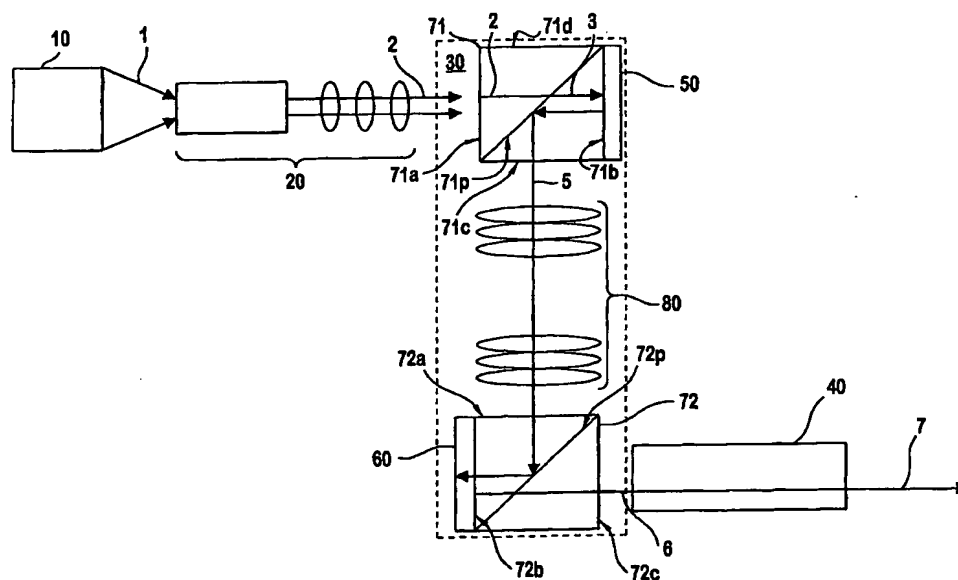

(57) Abstract: A light projection system projects an image comprising a matrix of light pixels having modulated luminance. The projection system includes a first imager configured to modulate a light band on a pixel-by-pixel basis proportional to gray scale values provided for each pixel of the image to provide a first output matrix. A second imager is positioned and configured to receive the first output matrix of modulated pixels of light and modulate the individual modulated pixels of light from said first imager on a pixel-by-pixel basis proportional to a second gray scale value provided for each pixel of the image.

WO 2004/051363 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.